

FL1500 SERIES FLOW CONTROLLER

Applications

- Wastewater
- Collection Systems
- Industrial Water



The Flexibility You Need.

The Hach FL1500 is the one stationary flow logger you need. Flexible sensor options deliver versatility for all of your flow applications. Take control of your data with sensors you can trust.

Ensure Accurate Data

Connected with Hach's complete portfolio of reliable flow sensors, the FL1500 gives you absolute confidence in your data. Sensor calibration prompts provide step-by-step guidance, reducing the likelihood of errors.

Simplify Your Toolkit

The FL1500 is the most agile Hach flow logger, working with the largest selection of Hach sensors to accommodate multiple applications. This multi-channel controller can handle up to four independent flow sensors. The FL1500 can be paired with peripheral equipment such as a rain gauge, pH sensor, auto sampler and mechanical totalizer. Collect measurements with ease from the Hach flow sensors you trust.

Prioritize Productivity

Built with an easy-to-use color screen, the FL1500 makes operations simpler and more productive. Flexible programming options via keypad, PC (FSDATA software), or USB stick makes programming easier than ever. Additionally, remote communication between the logger and a SCADA or PLC allows for seamless data retrieval.




Upload/download data and programs via USB.

Specifications*

| | |
|--|---|
| Size | 25.4 cm x 29.2 cm x 12.1 cm, (10.0"H x 12.5"W x 5.25"D), Including mounting bracket and clear cover (not including cord grips) |
| Display | ¼ VGA, Color, self-prompting menu-driven program |
| Materials | PC/ABS |
| Environmental Rating | NEMA 4X, IP66 |
| Operating Temperature | -20 to 60 °C (-4 to 140 °F) |
| Storage Temperature | -40 to 70 °C (-40 to 158 °F) |
| Power Requirements | AC: 100–240 VAC, 50/60 Hz, 15 watts DC: 10–30 VDC, 15 watts (Backup Battery option: 12 VDC lead acid battery with AC charger) |
| Sensor Connections | Basic model: 2, Advanced model: 4 |
| Sensor Options | Flo-Dar, SVS, Flo-Tote 3 (NOTE: Flo-Tote 3 is not CE compliant), Sub AV with AV9000S, US9001, US9003, BL9000, Digital Differential pH, Rain Gauge |
| Programming | Controller keypad, USB upload, or via PC using FSDATA Desktop software (requires Windows Operating System, Windows 7 or newer) |
| Data Storage | Maximum 829,440 measurements (180 days storage, 5-minute logging intervals for 16 parameters); data wraps when full |
| Data Download/Output | USB drive, FSDATA Desktop via USB connection |
| Communications | USB, RS485 (MODBUS) |
| Totalizer | Internal, settable and non-resettable, scalable totalizers. External, non-resettable mechanical totalizer option available on Advanced model. |
| Model Options: Basic, Advanced Inputs/Outputs | Basic: 2 Sensors, Rain, RS485, 1 analog input, 2 analog outputs (loop powered), Auxiliary (Sampler), IO9004 port Advanced: 4 Sensors, Rain, RS485, 1 analog input, 3 analog outputs (loop powered), Auxiliary, IO9004 port, 2 digital inputs, 2 digital outputs, electro-mechanical totalizer port |
| Relays | Two high voltage relays; Form C, SPDT, 20–230 VAC, 2.0 A |
| Program Languages | English, Spanish, Portuguese, French, German, Italian |
| Program Lock | Access code protection prevents tampering |
| Certifications | CE, cETLus, RCM |
| Weight | 3.2 kg (7.0 lb) |
| Warranty | 1 year, (EU: 2 years) |

*Subject to change without notice.

Mounting Dimensions

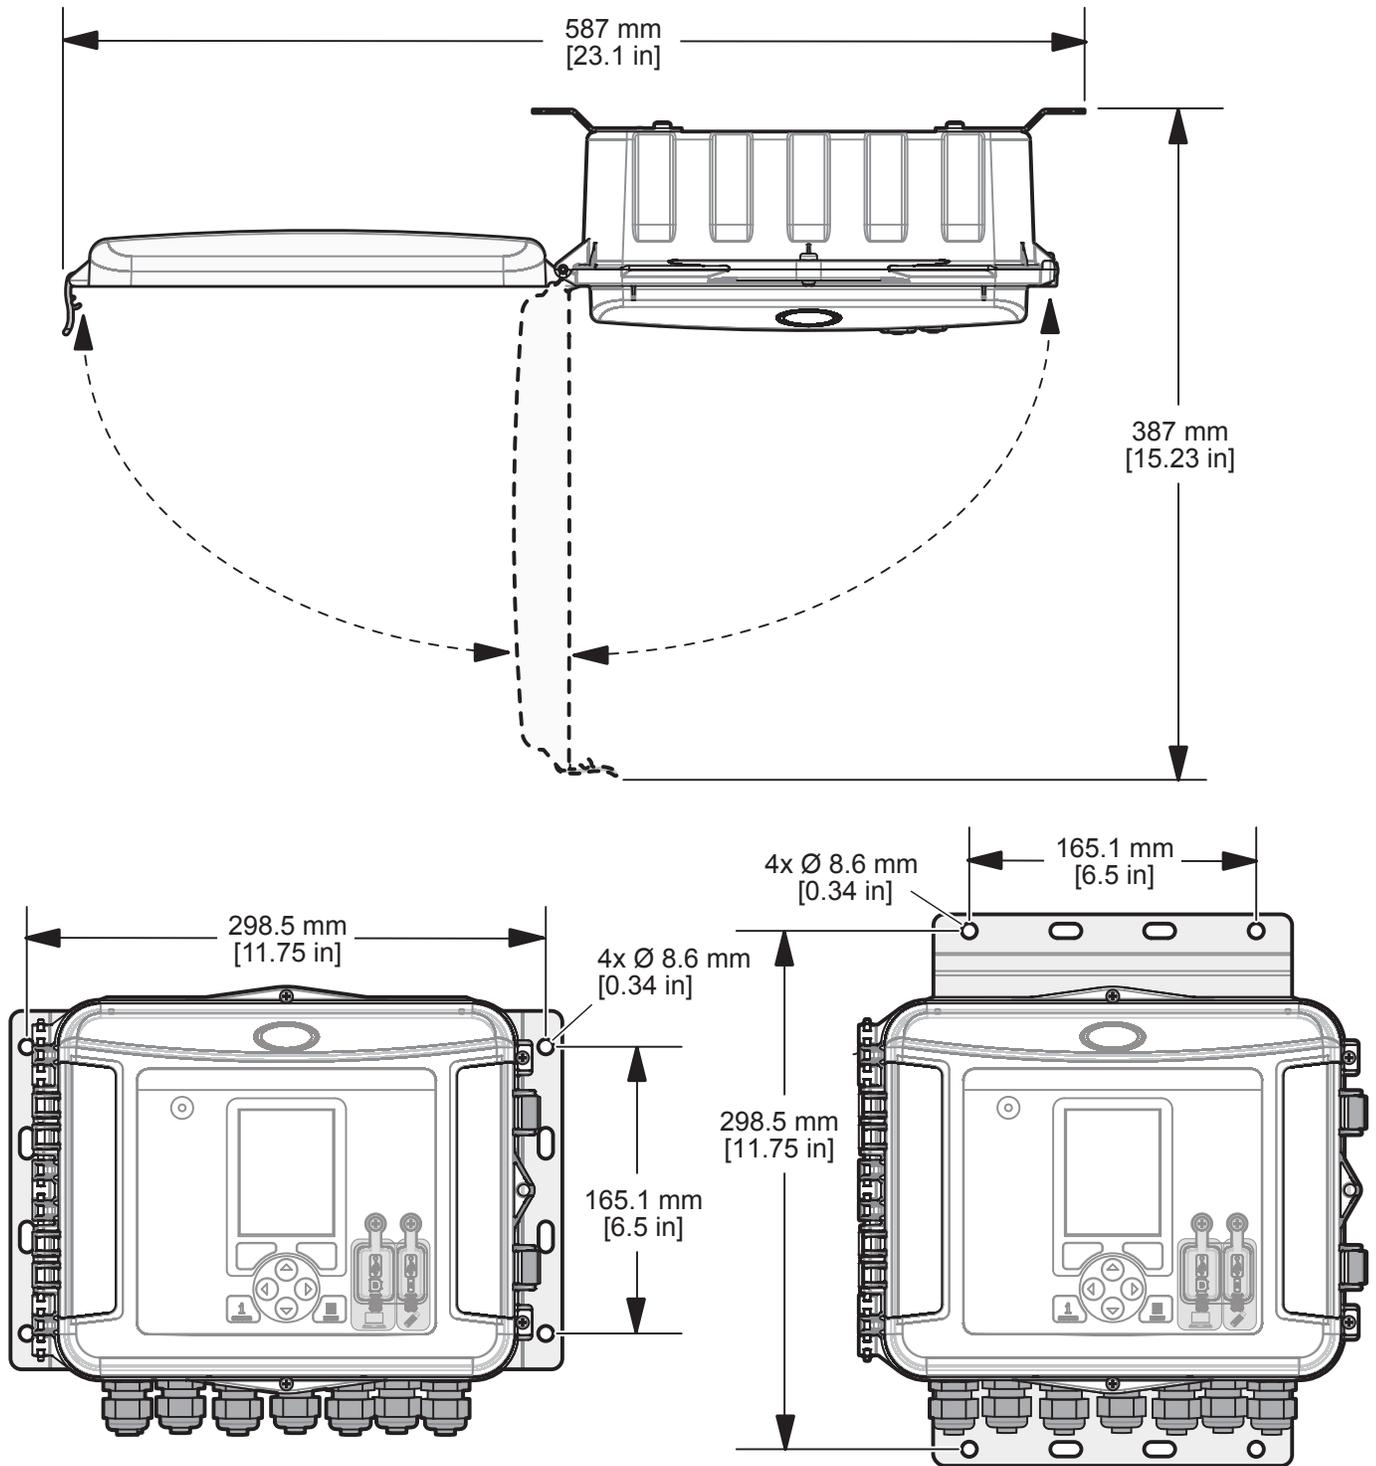

Ordering Information

| Hach FL1500 Flow Controller | | LFV001.99. | __ | __ | N | X | H |
|--|--|------------|----|----|---|---|---|
| Power | | | | | | | |
| 10-30 VDC | | D | | | | | |
| Universal 100-240VAC 50/60Hz - Without cord | | W | | | | | |
| Universal 100-240VAC 50/60Hz - US cord | | U | | | | | |
| Universal 100-240VAC 50/60Hz - EU cord | | E | | | | | |
| Universal 100-240VAC 50/60Hz - UK cord | | K | | | | | |
| Universal 100-240VAC 50/60Hz - AU cord | | A | | | | | |
| Connectivity Options | | | | | | | |
| Basic: 2 Sensors, Rain, RS485, 1 analog input, 2 analog outputs, Auxiliary, IO9004 port | | | 2 | | | | |
| Advanced: 4 Sensors, Rain, RS485, 1 analog input, 3 analog outputs, Auxiliary, IO9004 port, 2 digital inputs, 2 digital outputs, electro-mechanical totalizer port | | | 4 | | | | |



Accessories

| | | | |
|----------------|---|----------------|---|
| 8314000 | Internal desiccant tube with desiccant | 8308000 | pH sensor adaptor cable |
| 8321200 | External desiccant, (required when using FLO-DAR® or FLO-TOTE®) | 8319000 | Pipe mounting kit |
| 8755500 | Bulk, desiccant beads (1.5 lbs) | 8307700 | Mechanical totalizer |
| 8317900 | US Power cable, 115 VAC, 10 A, 2.4 m (8 ft) | 8528500 | Half cable to AS950 sampler, 2.7m (9 ft) |
| 8318000 | EU power cord, 115 VAC, 10 A, 2.4 m (8 ft) | 8528501 | Half cable to AS950 sampler, 7.6m (25 ft) |
| 8318100 | UK power cord, 115 VAC, 10 A, 2.4 m (8 ft) | 8319200 | Sun/rain shield |
| 8318200 | AU power cord, 115 VAC, 10 A, 2.4 m (8 ft) | | <i>AC backup battery 8757400 [requires power half cable 8307900 and AC power supply 8754500XX where XX=US, EU, UK or AU].</i> |
| 8320800 | USB Type A to B cable | | |

For additional information on products mentioned in this data sheet, download the following data sheets at: hachflow.com

FLO-DAR® AV Sensor (LIT2708)

FLO-TOTE® 3 AV Sensor (LIT2712)

AV9000 Module with Submerged AV Flow Sensor (DOC053.53.35082)

BL9000 Bubble Level Sensor (DOC053.53.35138)

Hach US9000 Ultrasonic Sensors (LIT2804)

FSDATA Desktop Instrument Manager (LIT2832)

Hach World Headquarters: Loveland, Colorado USA

United States: 800-368-2723 tel 970-669-5150 fax hachflowsales@hach.com

Outside United States: 970-622-7120 tel

hachflow.com

Printed in U.S.A. ©Hach 2017. All rights reserved.

In the interest of improving and updating its equipment, Hach reserves the right to alter specifications to equipment at any time.

**MARSH
McBIRNEY SIGMA**



Be Right™